

Two stage progressive gas burners

RS 50-64



- Two stage progressive gas burners

RS 50-64 burners series covers a firing range from 115 to 850 kW, and it has been designed for use in low or medium temperature hot water boilers, hot air or steam boilers, diathermic oil boilers.

Operation is "two stage progressive"; the burners are fitted with a microprocessor-based burner safety control box which supplies indication of operation and diagnosis of fault cause.

The elevated performance of the fans and combustion head, guarantee flexibility of use and excellent working at all firing rates.

The exclusive design ensures reduced dimensions, simple use and maintenance. Optimization of sound emissions is guaranteed by the special design of the air suction circuit and by incorporated sound proofing material. A wide range of accessories guarantees elevated working flexibility.

Guidelines for installation of burners in conformity to EU Regulation:

A RIELLO burner (Heat Generator), where it is matched with a water-based boiler (Heater Housing) with a nominal output ≤ 400 kW, providing heat for heating purposes and heat to deliver sanitary hot water, can be installed:

- With boilers (heater housings) already in service in the field, for replacement of identical products, in conformity to Article 1, paragraph 2, point (G) of the EU Regulation No. 813/2013;
- With boilers (heater housings) on a new installation, if they have emissions complying with the requirement of Annex II, paragraph 4 of the EU regulation No. 813/2013.

TECHNICAL DATA


Description	Heat output natural gas		Total electrical power kW	Electric power supply		Certification	Note	Code
	kW	Nm ³ /h		Ph/V/Hz	V/Hz			
MODELS FOR STANDARD OPERATION (FS1: ONE STOP EVERY 24 HOURS)								
RS 50 TC FS1	115/290-600	12/29-58	0.75	3/400/50	230/50-60	CE-0085AP0735	(1)	3784702
RS 50 TL FS1	115/290-600	12/29-58	0.75	3/400/50	230/50-60	CE-0085AP0735	(1)	3784703
RS 50 TC FS1	115/290-600	12/29-58	0.75	3/380/60	230/50-60	-	(1)	3784720
RS 50 TL FS1	115/290-600	12/29-58	0.75	3/380/60	230/50-60	-	(1)	3784721
RS 64 MZ TC FS1	150/400-850	15/40-85	1.50	3/400/50	230/50-60	CE-0085BR0558	(1)	3789310
RS 64 MZ TL FS1	150/400-850	15/40-85	1.50	3/400/50	230/50-60	CE-0085BR0558	(1)	3789311
RS 64 MZ TC FS1	150/400-850	15/40-85	1.50	3/380/60	230/50-60	-	(1)	3789380

Net calorific value of natural gas (G20): 10 kWh/Nm³.

The burners comply with 2016/426/EU Regulation, 2014/30/EU - 2014/35/EU - 2006/42/EC Directives and EN 676 Standard.

(1) Model with plug and socket.


FIRING RATES

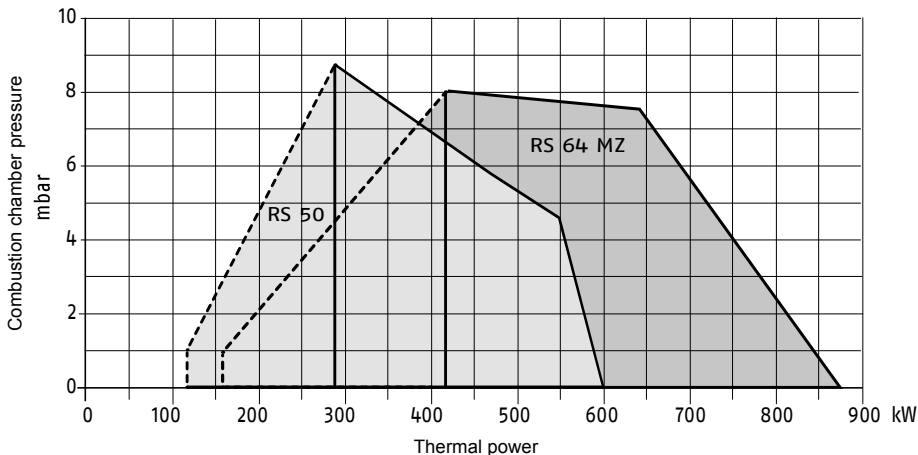


Useful firing rates for choosing the burner
 1st stage operation range
 Test conditions conforming to EN676
 Temperature: 20 °C
 Pressure: 1013.5 mbar
 Altitude: 0 m a.s.l.

OVERALL DIMENSIONS



RS 50

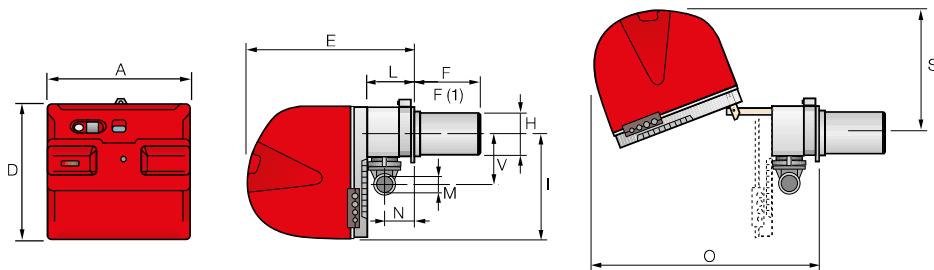

RS 64 MZ

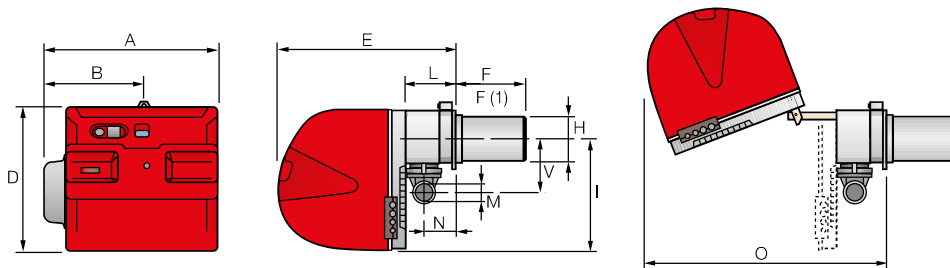

Description	A mm	B mm	D mm	E mm	F - F(1) mm	H mm	I mm	L mm	M mm	N mm	O mm	S mm	V mm
RS 50	476	-	474	580	216 - 351	152	352	164	1 1/2"	108	810	367	168
RS 64 MZ	533	300	490	640	250 - 385	179	352	222	Rp 2"	134	870	-	221





Description	D1 mm	D2 mm	Ø mm
RS 50	160	224	M8
RS 64 MZ	185	275-325	M12

Description	X (1) mm	Y mm	Z mm	Net weight kg
RS 50	1200	502	520	41
RS 64 MZ	1200	580	520	42



(1) Dimension with standard and extended head.

PRESSURE LOSS DIAGRAMS

MB SERIES GAS TRAIN

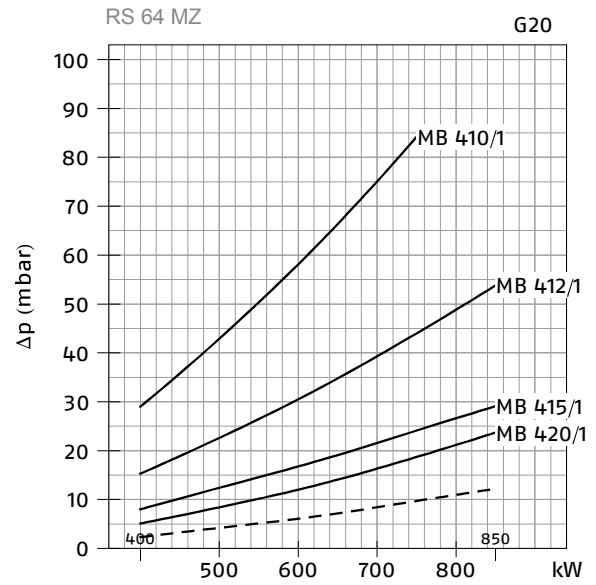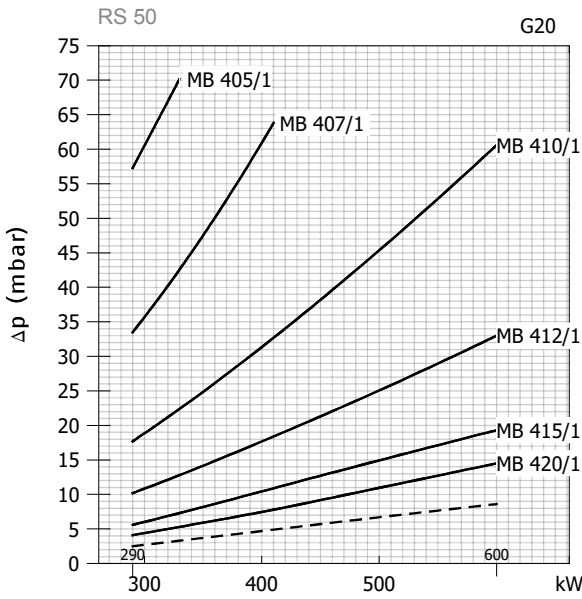

VGD SERIES GAS TRAIN

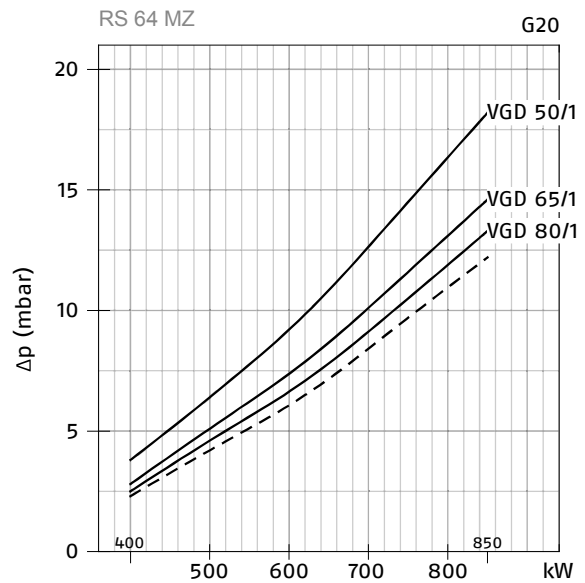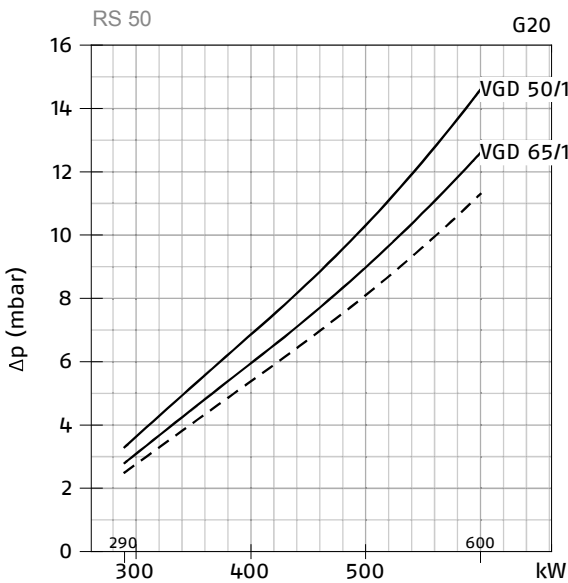

Please note: the diagrams indicate the minimum gas pressure drops of the burners equipped with the gas trains to be used (approved according to the EN 676 standard); in order to obtain the minimum pressure required at gas train inlet, combustion chamber counterpressure (expressed in mbar) must be added to this value.

— Combustion head + gas train
 - - - Combustion head

GAS TRAINS

Description (1)	Code	Note	Ø Gas train	Valve seal control (2)	VPS kit code (3)	Burner-gas train adapter (4)	
						RS 50	RS 64 MZ
MB SERIES ONE STAGE GAS TRAIN							
MB 405/1-RT 20	3970500*		Rp 3/4"	-	3010123	3000824	●
MB 407/1-RT 20	3970553*		Rp 3/4"	-	3010123	3000824	●
MB 407/1-RT 52	3970599*		Rp 3/4"	-	3010123	3000824	●
MB 407/1-RSM 20	3970229*		Rp 3/4"	-	3010123	3000824	●
MB 410/1-RT 52	3970258*		Rp 1" 1/4	-	3010123	3010124	3000843
MB 410/1-RT 20	3970554*		Rp 3/4"	-	3010123	3000824	3000824+ 3000843
MB 410/1-RT 52	3970600*		Rp 3/4"	-	3010123	3000824	
MB 410/1-RSM 20	3970230*		Rp 3/4"	-	3010123	3000824	

GAS

LIGHT OIL

DUAL FUEL






HEAVY OIL









Description (1)	Code	Note	Ø Gas train	Valve seal control (2)	VPS kit code (3)	Burner-gas train adapter (4)	
						RS 50	RS 64 MZ
MB 412/1-RT 52	3970256*		Rp 1" ½	-	3010123	☐	3000843
MB 412/1-RT 20	3970144*		Rp 1" ½	-	3010123	☐	3000843
MB 412/1 CT RT 20	3970197**		Rp 1" ½	◆	◆	☐	3000843
MB 412/1-RSM 20	3970231*		Rp 1" ½	-	3010123	☐	3000843
MB 415/1-RT 30	3970180*		Rp 1" ½	-	3010123	☐	3000843
MB 415/1 CT RT 30	3970198**		Rp 1" ½	◆	◆	☐	3000843
MB 415/1-RT 52	3970250*		Rp 1" ½	-	3010123	☐	3000843
MB 415/1 CT RT 52	3970253**		Rp 1" ½	◆	◆	☐	3000843
MB 415/1-RSM 30	3970232*		Rp 1" ½	-	3010123	☐	3000843
MB 420/1-RT 30	3970181*		Rp 2"	-	3010123	3000822	☐
MB 420/1 CT RT 30	3970182**		Rp 2"	◆	◆	3000822	☐
MB 420/1-RT 52	3970257*		Rp 2"	-	3010123	3000822	☐
MB 420/1 CT RT 52	3970252**		Rp 2"	◆	◆	3000822	☐
MB 420/1-RSM 30	3970233*		Rp 2"	-	3010123	3000822	☐
MB 420/1 CT RSM 30	3970234**		Rp 2"	◆	◆	3000822	☐
VGD SERIES ONE STAGE GAS TRAIN							
VGD 50/1-RT 122	20137718*		Rp 2"	-	3010123+ 20186306	3000822	☐
VGD 50/1 CT RT 122	20169190**		Rp 2"	◆	◆	3000822	☐
VGD 65/1-FT 122	20140762*	(5)	DN65	-	3010123	3000826+ 3000822	3000826
VGD 65/1 CT FT 122	20169191**	(5)	DN65	◆	◆	3000826+ 3000822	3000826
VGD 80/1-FT 122	20140763*		DN 80	-	3010123	●	3000826
VGD 80/1 CT FT 122	20169192**		DN 80	◆	◆	●	3000826

- (1) Please refer to "GAS TRAIN DESIGNATION".
 (2) The valve seal control device is compulsory (conforming to EN 676) on gas trains to burners with a maximum output over 1200 kW.
 (3) Valve leak detection control device. Supplied separately from the gas train (see "GAS TRAIN ACCESSORIES" paragraph for both 50 Hz and 60 Hz codes).
 (4) The code indicates the adapter necessary for "burner-gas train connection (see "GAS TRAINS ACCESSORIES").
 (5) Ø in = DN65; Ø out = DN80
 * 230V/50Hz - 220V/60Hz electrical supply.
 ** 230V/50Hz electrical supply.
 NOTE: for further information, refer to section "GAS TRAINS FOR BURNERS".

- Key to symbols:
 - Gas train not equipped with leak detection control device; this device can be ordered separately - see VPS column - and installed later.
 ◆ Gas train equipped with leak detection control device.
 ☐ Additional adapter not necessary, the gas train may be connected directly to the burner.
 ● Gas train not available or not suitable for the matching to the burner.

ACCESSORIES

Drawing	Burner model	Specification	Note	Code
	RS 50 RS 64 MZ	EXTENDED HEAD KIT Burners standard head can be transformed into "extended head" versions by using the special kit. Here the kits available for the various burners are listed, showing the original and the extended lengths. Standard head length = 216 mm - Extended head length = 351 mm Standard head length = 250 mm - Extended head length = 385 mm		3010078 3010427
	RS 50	CONNECTION FLANGE KIT A kit is available for use where the burner opening on the boiler is of excessive diameter.		3010138
	RS 50 RS 64 MZ	SPACER KIT If burner head penetration into the combustion chamber needs reducing, varying thickness spacers are available. Spacer thickness S = 110 mm Spacer thickness S = 135 mm		3010095 3010129
	All models	CONTINUOUS VENTILATION KIT If the burner requires continuous ventilation in the stages without flame, a special kit is available.		3010094
	All models	GROUND FAULT INTERRUPTER KIT A ground fault interrupter kit is available as a safety device in case of electrical system fault.		3010321

Drawing	Burner model	Specification	Note	Code
	All models	SOUND PROOFING BOX If noise emission needs reducing even further, sound-proofing boxes are available. When a lower "B" dimension is required, it is available the box support kit code 20065135 which allows to reduce it at the fixed dimension of 55 mm. The sound-proofing boxes are not suitable for outdoor use. Box type: C1/3 Dimensions: A = 650 mm, B (min-max) = 372-980 mm, C = 110 mm D = 690 mm, E = 770 mm Average noise reduction according to EN 15036-1 Standard = 10 dB(A).		3010403
	RS 64 MZ	VOLT FREE CONTACT KIT A volt free contact kit is available for installation onto the burner. It can be used for a remote interface between burner operating signals. Every burner can be equipped with a single kit for a remote check of the flame presence signal and the burner lockout indication.		3010419
	RS 50	LPG KIT For burning LPG gas, a special kit is available to be fitted to the combustion head on the burner. Kit code for standard and extended head.		20008173
	RS 64 MZ	Kit code for standard head.		3010434
	RS 64 MZ	Kit code for extended head.		3010435
	RS 50	TOWN GAS KIT For burning town gas, a special kit is available to be fitted to the combustion head on the burner. Kit code for standard and extended head.	(1)	3010285
	RS 50 TC/TL	VIBRATION REDUCTION KIT The kit allow you to improve flame stability in some applications, where the boiler/flue assembly is liable to resonate.	(2)	3010200
	All models	GAS MAX PRESSURE SWITCH If necessary a gas max pressure switch kit is available and connectable to the burner electrical wiring trough plugs & sockets system.		3010493
	RS 64 MZ	DN80 GAS FLANGE KIT To modify the standard Rp 2" burner gas input connection in to DN80 connection, a specific gas flange is available.		3010439
	All models	PROTECTION KIT (ELECTROMAGNETIC INTERFERENCES) When the burner is installed in a room particularly subject to electromagnetic interference (signals emitted over 10 V/m) due for example to INVERTER presence or in systems where the lengths of the thermostat connections is over 20 meters, this specific protection kit is available as an interface between the thermostatic controls and the burner.		3010386
	All models	PC INTERFACE KIT To connect the control box to a personal computer for the transmission of operation, fault signals and detailed service information, an interface adapter with PC software are available.		3002719

(1) Without CE certification.

(2) CE approved.

STATE OF SUPPLY

Monoblock forced draught gas burner with two stage operation, fully automatic, made up of:

- Air suction circuit lined with sound-proofing material
- Fan with reverse curve blades (RS 50 models) or straight blades (RS 64 MZ models)
- Air damper for air flow setting and butterfly valve for regulating fuel output on 1st and 2nd stage controlled by a servomotor with variable cam
- Starting motor at 2800 rpm, three-phase 400V with neutral, 50Hz
- Combustion head, that can be set on the basis of required output, fitted with:
 - stainless steel end cone, resistant to corrosion and high temperatures
 - ignition electrodes
 - ionisation probe
 - gas distributor
 - flame stability disk
- Minimum air pressure switch stops the burner in case of insufficient air quantity at the combustion head
- Microprocessor-based burner safety control box, with diagnostic functions
- Plug and socket for electrical connections (RS 50-64 models)
- Burner on/off selection switch
- 1st - 2nd stage manual switch
- Flame inspection window
- Slide bars for easier installation and maintenance
- Protection filter against radio interference
- IP 44 electric protection level.

STANDARD EQUIPMENT

- 1 gas train flange
- 1 flange gasket
- 4 screws for fixing the flange
- 1 thermal screen
- 4 screws for fixing the burner flange to the boiler
- Wiring loom fittings for the electrical connection
- Instruction handbook for installation, use and maintenance
- Spare parts catalogue.

GAS

LIGHT OIL

DUAL FUEL

HEAVY OIL

Two stage progressive gas burners

RS 70-190



- Two stage progressive gas burners

RS 70-190 burners series covers a firing range from 192 to 2290 kW. and it has been designed for use in low or medium temperature hot water boilers. hot air or steam boilers. diathermic oil boilers.

Operation is "two stage progressive"; the burners are fitted with a microprocessor-based burner safety control box which supplies indication of operation and diagnosis of fault cause.

The elevated performance of the fans and combustion head. guarantee flexibility of use and excellent working at all firing rates.

The exclusive design ensures reduced dimensions. simple use and maintenance. Optimization of sound emissions is guaranteed by the special design of the air suction circuit and by incorporated sound proofing material. A wide range of accessories guarantees elevated working flexibility.

Guidelines for installation of burners in conformity to EU Regulation:

A RIELLO burner (Heat Generator), where it is matched with a water-based boiler (Heater Housing) with a nominal output ≤ 400 kW. providing heat for heating purposes and heat to deliver sanitary hot water. can be installed:

- With boilers (heater housings) already in service in the field. for replacement of identical products. in conformity to Article 1. paragraph 2. point (G) of the EU Regulation No. 813/2013;
- With boilers (heater housings) on a new installation. if they have emissions complying with the requirement of Annex II. paragraph 4 of the EU regulation No. 813/2013.

TECHNICAL DATA

Description	Heat output natural gas		Total electrical power kW	Electric power supply		Certification	Note	Code
	kW	Nm ³ /h		PhV/Hz	V/Hz			
MODELS FOR STANDARD OPERATION (FS1: ONE STOP EVERY 24 HOURS)								
RS 70 TC FS1	192/465-814	19/46.5-81	1.4	3/400/50	230/50-60	CE-0085AP0944	(2)	20194283
RS 70 TL FS1	192/465-814	19/46.5-81	1.4	3/400/50	230/50-60	CE-0085AP0944	(2)	20194356
RS 70 TC FS1	192/465-814	19/46.5-81	1.4	3/400/50	230/50-60	CE-0085AP0944	(1)	20194286
RS 70 TL FS1	192/465-814	19/46.5-81	1.4	3/400/50	230/50-60	CE-0085AP0944	(1)	20194878
RS 70 TC FS1	192/465-814	19/46.5-81	1.4	3/380/60	230/50-60	-	(2)	20195084
RS 70 TL FS1	192/465-814	19/46.5-81	1.4	3/380/60	230/50-60	-	(2)	20195085
RS 100 TC FS1	232/698-1163	23/70-116	1.8	3/400/50	230/50-60	CE-0085AP0945	(2)	20194281
RS 100 TL FS1	232/698-1163	23/70-116	1.8	3/400/50	230/50-60	CE-0085AP0945	(2)	20194293
RS 100 TC FS1	232/698-1163	23/70-116	1.8	3/400/50	230/50-60	CE-0085AP0945	(1)(2)	20194881
RS 100 TL FS1	232/698-1163	23/70-116	1.8	3/400/50	230/50-60	CE-0085AP0945	(1)(2)	20194884
RS 100 TC FS1	232/698-1163	23/70-116	1.8	3/380-460/60	230/50-60	-	(2)	20195086
RS 100 TL FS1	232/698-1163	23/70-116	1.8	3/380-460/60	230/50-60	-	(2)	20195087
RS 130 TC FS1	372/930-1512	37/93-151	2.6	3/400/50	230/50-60	CE-0085AP0946	(2)	20194288
RS 130 TL FS1	372/930-1512	37/93-151	2.6	3/400/50	230/50-60	CE-0085AP0946	(2)	20194295
RS 130 TC FS1	372/930-1512	37/93-151	2.6	3/400/50	230/50-60	CE-0085AP0946	(1)(2)	20194885
RS 130 TL FS1	372/930-1512	37/93-151	2.6	3/400/50	230/50-60	CE-0085AP0946	(1)(2)	20194887
RS 130 TC FS1	372/930-1512	37/93-151	2.6	3/380-460/60	230/50-60	-	(2)	20195088
RS 130 TL FS1	372/930-1512	37/93-151	2.6	3/380-460/60	230/50-60	-	(2)	20195089

Description	Heat output natural gas		Total electrical power kW	Electric power supply		Certification	Note	Code
	kW	Nm ³ /h		Ph/V/Hz	V/Hz			
RS 150 TC FS1	300/900-1850	30/90-185	3.5	400/50	230/50-60	CE-0085CS0428	(2)	20044636
RS 150 TL FS1	300/900-1850	30/90-185	3.5	400/50	230/50-60	CE-0085CS0428	(2)	20044637
RS 190 TC FS1	470/1279-2290	47/128-229	5.5	3/400/50	230/50-60	CE-0085AT0042	(2)	3785813
RS 190 TL FS1	470/1279-2290	47/128-229	5.5	3/400/50	230/50-60	CE-0085AT0042	(2)	20030087
RS 190 TC FS1	470/1279-2290	47/128-229	5.5	3/400/50	230/50-60	CE-0085AT0042	(1)(2)	3785814
RS 190 TC FS1	470/1279-2290	47/128-229	5.5	3/380/60	230/50-60	-	(2)	3785820
RS 190 TC FS1	470/1279-2290	47/128-229	5.5	3/220/60	220/60	-	(2)	20011699

Net calorific value of natural gas (G20): 10 kWh/Nm³.

The burners comply with 2016/426/EU Regulation, 2014/30/EU - 2014/35/EU - 2006/42/EC Directives and EN 676 Standard.

(1) Model with plug and socket.

(2) Model with terminal board.


NOTE: due to the improvement of the technical specification of some products, some burner codes have been changed. For correspondence between new and previous code, see the Tab below.

Description	NEW CODE	Note	OLD CODE	Note
RS 70 TC FS1 3/230-400/50	20194283	(3)	3785102	(4)
RS 70 TL FS1 3/230-400/50	20194356	(3)	3785103	(4)
RS 70 TC FS1 3/230-400/50	20194286	(3)	3785104	(4)
RS 70 TL FS1 3/230-400/50	20194878	(3)	3785105	(4)
RS 70 TC FS1 3/220-380/60	20195084	(3)	3785120	(4)
RS 70 TL FS1 3/220-380/60	20195085	(3)	3785121	(4)
RS 100 TC FS1 3/230-400/50	20194281	(3)	3785302	(4)
RS 100 TL FS1 3/230-400/50	20194293	(3)	3785303	(4)
RS 100 TC FS1 3/230-400/50	20194881	(3)	3785304	(4)
RS 100 TL FS1 3/230-400/50	20194884	(3)	3785305	(4)
RS 100 TC FS1 3/220/380-460/60	20195086	(3)	3785320	(4)
RS 100 TL FS1 3/220/380-460/60	20195087	(3)	3785321	(4)
RS 130 TC FS1 3/230-400/50	20194288	(3)	3785502	(4)
RS 130 TL FS1 3/230-400/50	20194295	(3)	3785503	(4)
RS 130 TC FS1 3/230-400/50	20194885	(3)	3785504	(4)
RS 130 TL FS1 3/230-400/50	20194887	(3)	3785505	(4)
RS 130 TC FS1 3/220/380-460/60	20195088	(3)	3785520	(4)
RS 130 TL FS1 3/220/380-460/60	20195089	(3)	3785521	(4)


(3) With SQN73

(4) With LKS


FIRING RATES

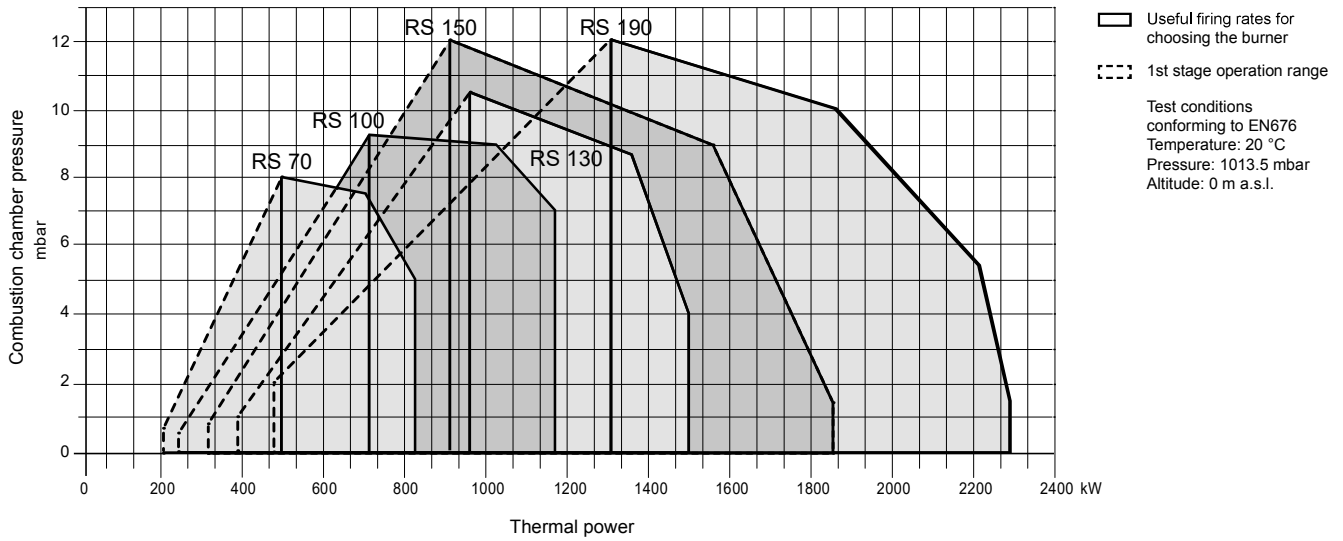


OVERALL DIMENSIONS

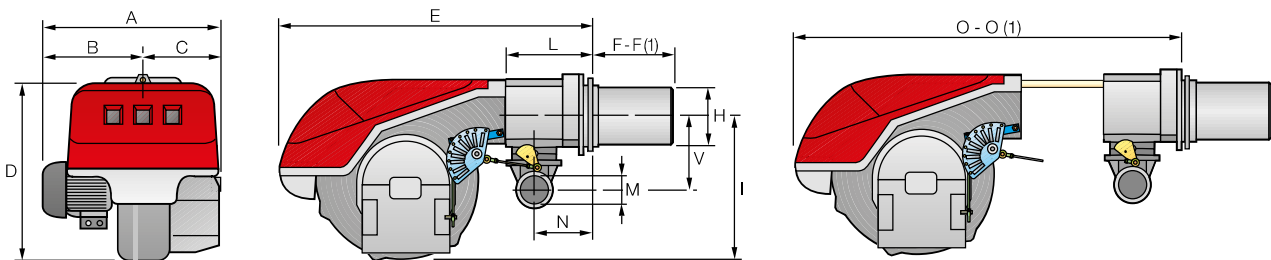

Description	A mm	B mm	C mm	D mm	E mm	F-F(1) mm	H mm	I mm	L mm	M mm	N mm	O-O(1) mm	V mm
RS 70	511	296	215	555	840	250-385	179	430	214	Rp 2"	134	1161-1296	221
RS 100	527	312	215	555	840	250-385	179	430	214	Rp 2"	134	1162-1296	221
RS 130	553	338	215	555	840	280-415	189	430	214	Rp 2"	134	1163-1296	221
RS 150	675	370	305	590	840	280-415	189	435	214	Rp 2"	134	1180-1315	221
RS 190	681	366	315	555	872	370-520	222	430	246	Rp 2"	150	1328-1	262



Description	D1 mm	D2 mm	Ø mm
RS 70	185	275-325	M12
RS 100	185	275-325	M12
RS 130	195	275-325	M12
RS 150	195	275-325	M12
RS 190	230	325-368	M16




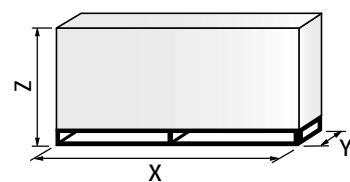


Description	X (1) mm	Y mm	Z mm	Net weight kg
RS 70	1405	700	660	70
RS 100	1405	700	660	73
RS 130	1400	700	660	76
RS 150	1400-1420	1000	660	110
RS 190	1400-1420	1000	660	115

(1) Dimension with standard and extended head.

PRESSURE LOSS DIAGRAMS

MB SERIES GAS TRAIN

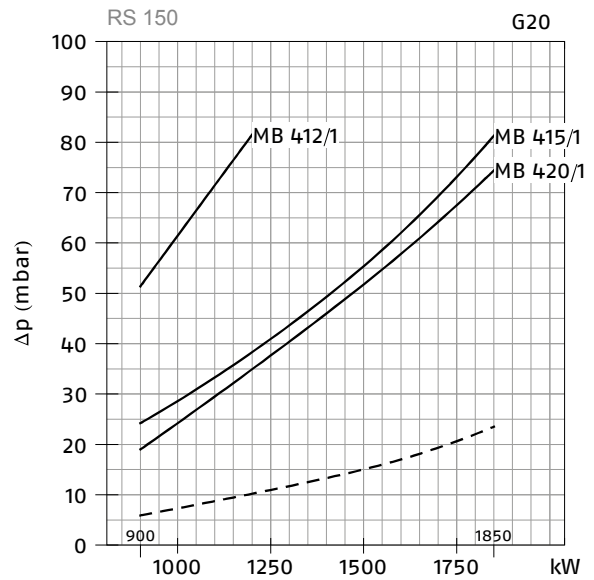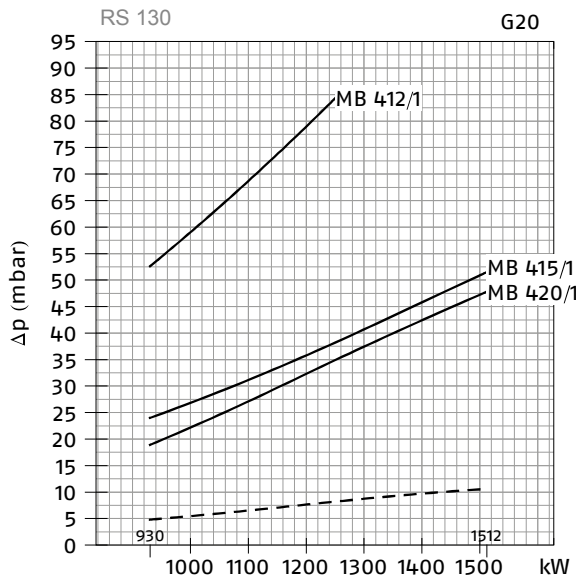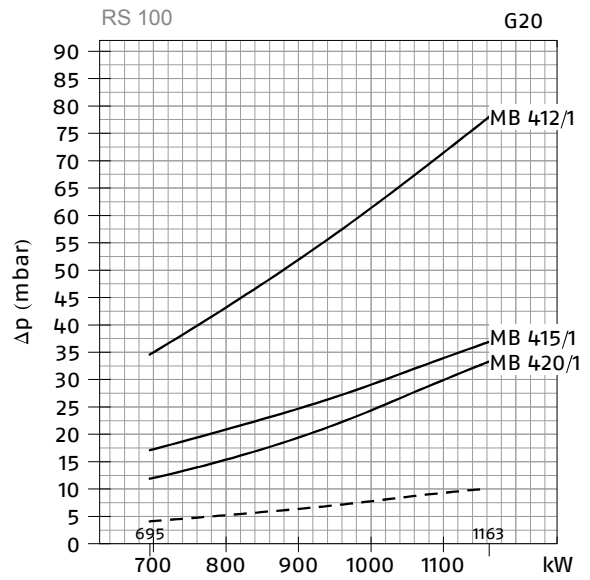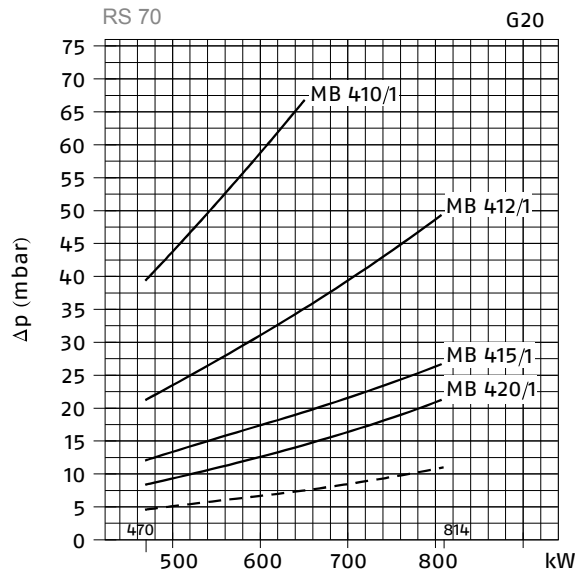

Please note: the diagrams indicate the minimum gas pressure drops of the burners equipped with the gas trains to be used (approved according to the EN 676 standard); in order to obtain the minimum pressure required at gas train inlet, combustion chamber counterpressure (expressed in mbar) must be added to this value.

— Combustion head + gas train
 - - - Combustion head


GAS

LIGHT OIL

DUAL FUEL



HEAVY OIL

GAS


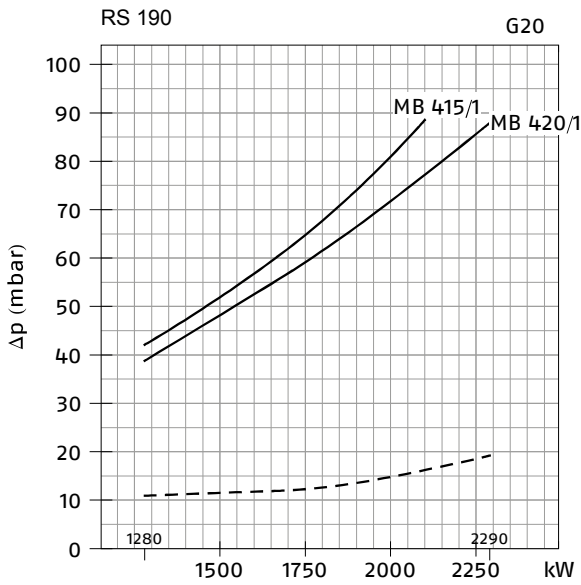


LIGHT OIL

VGD SERIES GAS TRAIN

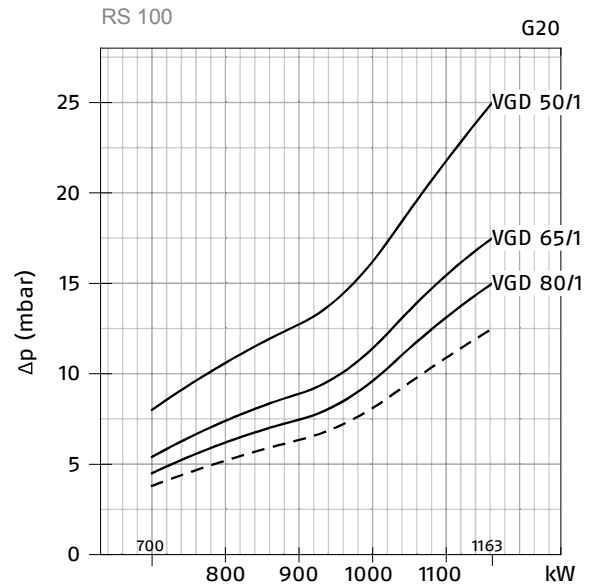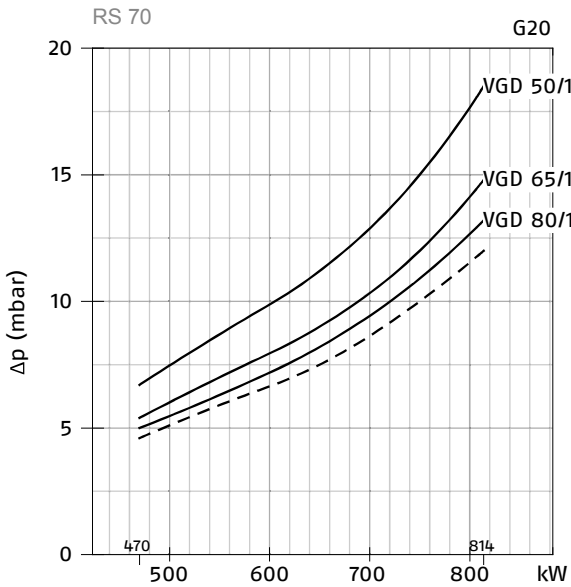


DUAL FUEL

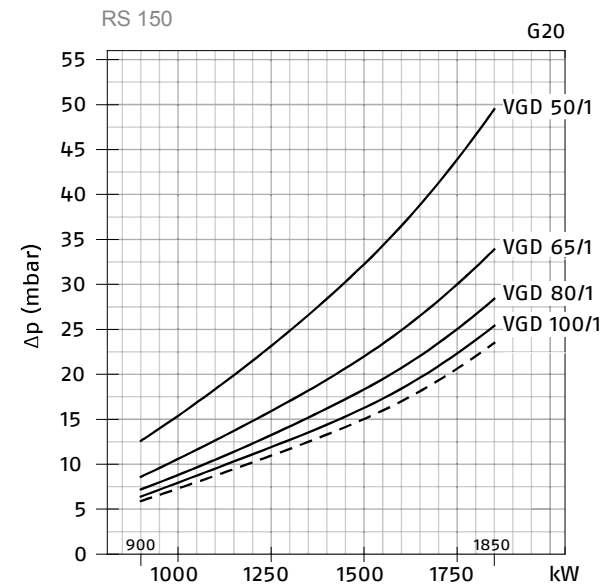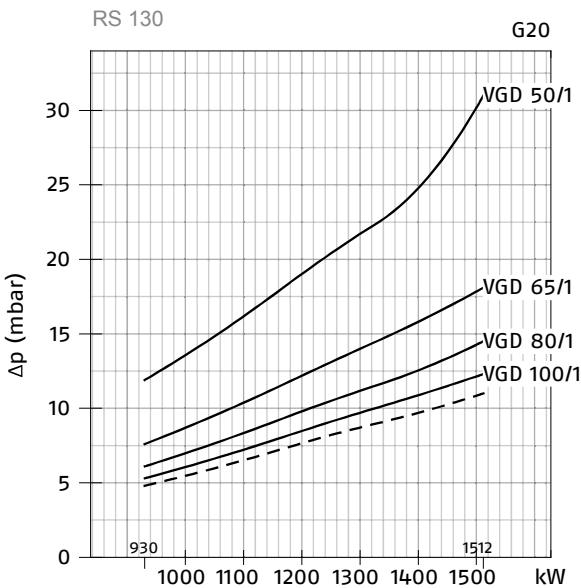

HEAVY OIL

Please note: the diagrams indicate the minimum gas pressure drops of the burners equipped with the gas trains to be used (approved according to the EN 676 standard); in order to obtain the minimum pressure required at gas train inlet, combustion chamber counterpressure (expressed in mbar) must be added to this value.

— Combustion head + gas train
 - - - Combustion head

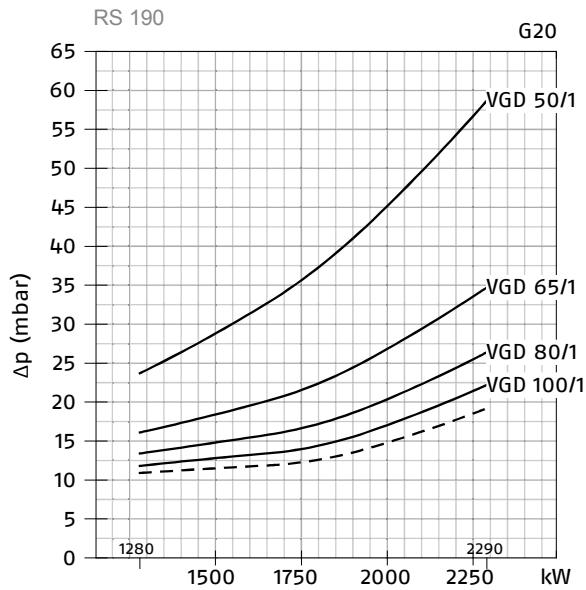

Please note: the diagrams indicate the minimum gas pressure drops of the burners equipped with the gas trains to be used (approved according to the EN 676 standard); in order to obtain the minimum pressure required at gas train inlet, combustion chamber counterpressure (expressed in mbar) must be added to this value.

— Combustion head + gas train
 - - - Combustion head

GAS TRAINS

Description (1)	Code	Note	Ø Gas train	Valve seal control (2)	VPS kit code (3)	Burner-gas train adapter (4)				
						RS 70	RS 100	RS 130	RS 150	RS 190
MB SERIES ONE STAGE GAS TRAIN										
MB 410/1-RT 52	3970258*		Rp 1" ¼	-	3010123	3000843	●	●	●	●
MB 410/1-RT 20	3970554*		Rp ¾"	-	3010123	3000824+ 3000843	●	●	●	●
MB 410/1-RT 52	3970600*		Rp ¾"	-	3010123		●	●	●	●
MB 410/1-RSM 20	3970230*		Rp ¾"	-	3010123		●	●	●	●
MB 412/1-RT 52	3970256*		Rp 1" ½	-	3010123			3000843		
MB 412/1-RT 20	3970144*		Rp 1" ½	-	3010123		3000843			
MB 412/1 CT RT 20	3970197**		Rp 1" ½	◆	◆		3000843			
MB 412/1-RSM 20	3970231*		Rp 1" ½	-	3010123		3000843			
MB 415/1-RT 30	3970180*		Rp 1" ½	-	3010123		3000843			
MB 415/1 CT RT 30	3970198**		Rp 1" ½	◆	◆		3000843			
MB 415/1-RT 52	3970250*		Rp 1" ½	-	3010123		3000843			
MB 415/1 CT RT 52	3970253**		Rp 1" ½	◆	◆		3000843			
MB 415/1-RSM 30	3970232*		Rp 1" ½	-	3010123		3000843			
MB 420/1-RT 30	3970181*		Rp 2"	-	3010123	□	□	□	□	□
MB 420/1 CT RT 30	3970182**		Rp 2"	◆	◆	□	□	□	□	□
MB 420/1-RT 52	3970257*		Rp 2"	-	3010123	□	□	□	□	□
MB 420/1 CT RT 52	3970252**		Rp 2"	◆	◆	□	□	□	□	□
MB 420/1-RSM 30	3970233*		Rp 2"	-	3010123	□	□	□	□	□
MB 420/1 CT RSM 30	3970234**		Rp 2"	◆	◆	□	□	□	□	□
VGD SERIES ONE STAGE GAS TRAIN										
VGD 50/1-RT 122	20137718*		Rp 2"	-	3010123+ 20186306	□	□	□	□	□
VGD 50/1 CT RT 122	20169190**		Rp 2"	◆	◆	□	□	□	□	□
VGD 65/1-FT 122	20140762*	(5)	DN65	-	3010123			3000826		
VGD 65/1 CT FT 122	20169191**	(5)	DN65	◆	◆			3000826		
VGD 80/1-FT 122	20140763*		DN80	-	3010123			3000826		
VGD 80/1 CT FT 122	20169192**		DN80	◆	◆			3000826		
VGD 100/1-FT 122	20169193*		DN100	-	3010123	●	●	3000826+3010223		

Description (1)	Code	Note	Ø Gas train	Valve seal control (2)	VPS kit code (3)	Burner-gas train adapter (4)				
						RS 70	RS 100	RS 130	RS 150	RS 190
VGD 100/1 CT FT 122	20169194**		DN100	◆	◆	●	●			3000826+3010223








- (1) Please refer to "GAS TRAIN DESIGNATION".
- (2) The valve seal control device is compulsory (conforming to EN 676) on gas trains to burners with a maximum output over 1200 kW.
- (3) Valve leak detection control device. Supplied separately from the gas train (see "GAS TRAIN ACCESSORIES" paragraph for both 50 Hz and 60 Hz codes).
- (4) The code indicates the adapter necessary for "burner-gas train connection (see "GAS TRAINS ACCESSORIES)".
- (5) Ø in = DN65; Ø out = DN80
- * 230V/50Hz - 220V/60Hz electrical supply.
- ** 230V/50Hz electrical supply.






NOTE: for further information, refer to section "GAS TRAINS FOR BURNERS".

Key to symbols:

- Gas train not equipped with leak detection control device; this device can be ordered separately - see VPS column - and installed later.
- ◆ Gas train equipped with leak detection control device.
- Additional adapter not necessary, the gas train may be connected directly to the burner.
- Gas train not available or not suitable for the matching to the burner.

ACCESSORIES

Drawing	Burner model	Specification	Note	Code
	RS 70	EXTENDED HEAD KIT Burners standard head can be transformed into "extended head" versions by using the special kit. Here the kits available for the various burners are listed, showing the original and the extended lengths. Standard head length = 250 mm - Extended head length = 385 mm		3010117
	RS 100	Standard head length = 250 mm - Extended head length = 385 mm		3010118
	RS 130	Standard head length = 280 mm - Extended head length = 415 mm		3010119
	RS 150	Standard head length = 280 mm - Extended head length = 415 mm		20052186
	RS 190	Standard head length = 370 mm - Extended head length = 520 mm	(1)	3010443
	RS 70-150	SPACER KIT If burner head penetration into the combustion chamber needs reducing, varying thickness spacers are available. Spacer thickness S = 135 mm		3010129
	RS 190	Spacer thickness S = 102 mm		3000722
RS 70-130	CLEAN CONTACTS KIT Each burner can be equipped with a single kit.			20123294
	All models	CONTINUOUS VENTILATION KIT If the burner requires continuous ventilation in the stages without flame, a special kit is available.		3010094
	All models	SOUND PROOFING BOX If noise emission needs reducing even further, sound-proofing boxes are available. When a lower "B" dimension is required, it is available the box support kit code 20065135 which allows to reduce it at the fixed dimension of 55 mm. The sound-proofing boxes are not suitable for outdoor use. Box type: C4/5 Dimensions: A = 850 mm, B (min-max) = 160-980 mm, C = 110 mm D = 980 mm, E = 930 mm Average noise reduction according to EN 15036-1 Standard = 10 dB(A).		3010404
	All models	GROUND FAULT INTERRUPTER KIT A ground fault interrupter kit is available as a safety device in case of electrical system fault.		3010329
	RS 70	LPG KIT For burning LPG gas, a special kit is available to be fitted to the combustion head on the burner. Kit code for standard head.		20008175
	RS 70	Kit code for extended head.		20008176
	RS 100	Kit code for standard head.		20008177
	RS 100	Kit code for extended head.		20008178
	RS 130	Kit code for standard head.		20008179
	RS 130	Kit code for extended head.		20008180
	RS 150	Kit code for standard head.		20050064
	RS 150	Kit code for extended head.		20050065
RS 190	Kit code for standard and extended head.		3010166	
	All models	GAS MAX PRESSURE SWITCH If necessary a gas max pressure switch kit is available and connectable to the burner electrical wiring trough plugs & sockets system.		3010493

Drawing	Burner model	Specification	Note	Code
		TOWN GAS KIT For burning town gas, a special kit is available to be fitted to the combustion head on the burner. Kit code for standard and extended head.		
	RS 70	Kit code for standard and extended head.	(2)	3010286
	RS 100	Kit code for standard and extended head.	(2)	3010287
	RS 130	Kit code for standard and extended head.	(2)	3010288
	RS 190	Kit code for standard and extended head.	(2)	3010297
		VIBRATION REDUCTION KIT The kit allow you to improve flame stability in some applications, where the boiler/flue assembly is liable to resonate.		
	RS 70 TC-TL	Kit code for standard and extended head.	(3)	3010201
	RS 100 TC- TL	Kit code for standard and extended head.	(3)	3010202
	RS 130 TC	Kit code for standard head.	(3)	3010373
	RS 130 TL	Kit code for extended head.	(3)	3010374
	RS 190 TC	Kit code for standard head.	(3)	3010375
	All models	DN80 GAS FLANGE KIT To modify the standard Rp 2" burner gas input connection in to DN80 connection, a specific gas flange is available.		3010439
	All models	PROTECTION KIT (ELECTROMAGNETIC INTERFERENCES) When the burner is installed in a room particularly subject to electromagnetic interference (signals emitted over 10 V/m) due for example to INVERTER presence or in systems where the lengths of the thermostat connections is over 20 meters, this specific protection kit is available as an interface between the thermostatic controls and the burner.		3010386
	RS 190	HEAD KIT FOR "REVERSE FLAME CHAMBER" In certain cases, the use of the burner on reverse flame boilers can be improved by using an additional cylinder. Standard head length with cylinder 493 mm.	(4)	3010241
	All models	PC INTERFACE KIT To connect the control box to a personal computer for the transmission of operation, fault signals and detailed service information, an interface adapter with PC software are available.		3002719

- (1) Kit to be used on burners recognizable by a serial number that is over or equal to 02426XXXXXX, for burners with a serial number that is under or equal to 02416XXXXXX please use the Kit coded 3010196.
- (2) Without CE certification.
- (3) CE approved.
- (4) CE approval on field is required.

STATE OF SUPPLY

Monoblock forced draught gas burner with two stage operation, fully automatic, made up of:

- Air suction circuit lined with sound-proofing material
- Fan with reverse curve blades (RS 70-100-130 models) or straight blades (RS 150-190 models)
- Air damper for air flow setting and butterfly valve for regulating fuel output on 1st and 2nd stage controlled by a servomotor with variable cam
- Starting motor at 2800 rpm, three-phase 400V with neutral, 50Hz
- Combustion head, that can be set on the basis of required output, fitted with:
 - stainless steel end cone, resistant to corrosion and high temperatures
 - ignition electrodes
 - ionisation probe
 - gas distributor
 - flame stability disk
- Minimum air pressure switch stops the burner in case of insufficient air quantity at the combustion head
- Microprocessor-based burner safety control box, with diagnostic functions
- Burner on/off selection switch
- 1st - 2nd stage manual switch
- Flame inspection window
- Slide bars for easier installation and maintenance
- Protection filter against radio interference
- IP 44 electric protection level.

STANDARD EQUIPMENT

- 1 gas train flange
- 1 flange gasket
- 4 screws for fixing the flange
- 1 thermal screen
- 4 screws for fixing the burner flange to the boiler
- 2 slide bar extensions (for extended head models and RS 150-190 model)
- Instruction handbook for installation, use and maintenance
- Spare parts catalogue.

Modulating gas burners

RS 34-44/M



- Modulating gas burners

RS 34-44/M burners series covers a firing range from 45 to 550 kW, and it has been designed for use in low or medium temperature hot water boilers, hot air or steam boilers, diathermic oil boilers.

Operation can be "two stage progressive" or, alternatively, "modulating" with the installation of a PID logic regulator and respective probes.

RS/M burners series guarantees high efficiency levels in all the various applications, thus reducing fuel consumption and running costs.

The exclusive design ensures reduced dimensions, simple use and maintenance. Optimisation of sound emissions is guaranteed by the special design of the air suction circuit and by incorporated sound proofing material.

A wide range of accessories guarantees elevated working flexibility.

Guidelines for installation of burners in conformity to EU Regulation:

A RIELLO burner (Heat Generator), where it is matched with a water-based boiler (Heater Housing) with a nominal output ≤ 400 kW, providing heat for heating purposes and heat to deliver sanitary hot water, can be installed:

- With boilers (heater housings) already in service in the field, for replacement of identical products, in conformity to Article 1, paragraph 2, point (G) of the EU Regulation No. 813/2013;
- With boilers (heater housings) on a new installation, if they have emissions complying with the requirement of Annex II, paragraph 4 of the EU regulation No. 813/2013.

TECHNICAL DATA

Description	Heat output natural gas		Total electrical power kW	Electric power supply		Certification	Note	Code
	kW	Nm ³ /h		Ph/V/Hz	V/Hz			
MODELS FOR STANDARD OPERATION (FS1: ONE STOP EVERY 24 HOURS)								
RS 34/M MZ TC FS1	45/125-390	4.5/12.5-39	0.6	1/230/50-60	230/50-60	CE-0085BR0378	(1)(2)	3788710
RS 34/M MZ TL FS1	45/125-390	4.5/12.5-39	0.6	1/230/50-60	230/50-60	CE-0085BR0378	(1)(2)	3788711
RS 44/M MZ TC FS1	80/203-550	8/20.3-55	0.7	1/230/50-60	230/50-60	CE-0085BR0378	(1)(2)	3788810
RS 44/M MZ TL FS1	80/203-550	8/20.3-55	0.7	1/230/50-60	230/50-60	CE-0085BR0378	(1)(2)	3788811
RS 44/M MZ TC FS1	80/203-550	8/20.3-55	0.75	3/400/50-60	230/50-60	CE-0085BR0378	(1)(2)	3788840
RS 44/M MZ TL FS1	80/203-550	8/20.3-55	0.75	3/400/50-60	230/50-60	CE-0085BR0378	(1)(2)	3788841

Net calorific value of natural gas (G20): 10 kWh/Nm³.

The burners comply with 2016/426/EU Regulation, 2014/30/EU - 2014/35/EU - 2006/42/EC Directives and EN 676 Standard.

(1) Model with plug and socket.

(2) Model with CMG/M control box.